

If distance and access are your problem, then take a look at the SuperSnake - the combined solution for distance wire feeding and restricted-access welding. The SuperSnake GT02S is the ultimate predator of the welding world, negotiating its terrain with ease.

■ SuperSnake	Ordering Codes	Weight	■ SuperSnake	■ SuperSnake Technical Dat
GT02S, 10 m	6153100	14 kg	Cable diameter	Cable diameter 50 mm <sup>2</sup>
GT02S, <b>15 m</b>	6153150	21 kg	Load capacity, 60%	Load capacity, 60% 380 A
GT02S, <b>20</b> m	6153200	28 kg	Supply voltage	Supply voltage 50 VDC
GT02S, <b>25 m</b>	6153250	35 kg	Feed mechanism	Feed mechanism Two-roll feed
GT02S <b>W, 10 m</b>	6154100	15 kg	Wire recommendations, 25 m	Wire recommendations, 25 m Solid Fe/SS
GT02S <b>W, 15 m</b>	6154150	22 kg		Al alloys
GT02S <b>W, 20 m</b>	6154200	30 kg		FCW/MCW
GT02S <b>W, 25 m</b>	6154250	37 kg	Wire feed rate	Wire feed rate 0-25 m/min
MXF Synchronisation kit	W004030		Protection class	Protection class IP23S
			Feeder body (GT02SW)	Feeder body (GT02SW) L x W x H







- SLENDER PROFILE. A tough and slim body profile makes it easy for the SuperSnake GT02S to follow the welder into the tightest spaces. There is no need to carry large, heavy wire feed units and cable sets.
- MANY OPTIONS. Model options include 10-, 15-, 20-, and 25-metre air- and liquid-cooled units. You have real choice for your welding environment.
- REMOTE POWER CONTROL. Easy and simple parameter adjustments are exactly where you need them — at the welding end. Adjust weld characteristics precisely in real time.
- METER DISPLAY. A large and clear meter display provides a welding parameter reference just where the welder needs it. The unit stores weld data conveniently for 30 s after welding.

- BRIGHTS<sup>M</sup>. LED cabinet lighting illuminates the wire feed mechanism from switch-on, improving visibility and safety for wire feed mechanism adjustment in low light conditions.
- GT WIREDRIVE™. Provides many years of reliable service.

  Simple adjustments, quick-change drive, and pressure rolls make life easy and simple.
- GUN CHOICE. The standard Euro gun connector allows a variety of welding guns to be fitted, including Kemppi's award-winning WeldSnake distance gun range.
- LOW FRICTION LOSS. Kemppi gun models use a unique, patented range of low-friction-loss DL liner materials that make welding and feeding aluminium and stainless steel wires over a distance simple and cost-effective.


- A COOL HEAD. When connected to Kemppi's HydroCool system, the liquid-cooled models allow welding 25 m above the cooler unit. When not in use, drain back is prevented so the welding qun remains `wet' at a height.
- VISIBLE SAFETY. Encased in high-visibility bright orange composite material, the SuperSnake GT02S has tough and slippery sheathing, supporting, protecting, and preventing cable stretch, plus signalling the potential tripping hazard.
- DECK OR BOOM. Use as a `deck-based' or 'boom delivery' system. With the optional aerial hanging kit, the SuperSnake GTO2S can be conveniently positioned above the welding area as a boom delivery wire feed system.



Traditional motor pistols and spool gun designs increase weight and strain on the operator's wrist and are limited by their distance, filler wire, or volume welding capability. The SuperSnake GT02S resolves all of these issues, providing distance and volume welding, whilst reducing the weight and strain on the operator's wrist by using standard welding guns.

Liberate your welding team by giving greater freedom of movement.

The SuperSnake GT02S removes the need to carry large and heavy wire feed units, reducing personnel fatigue, improving safety, and increasing productivity.

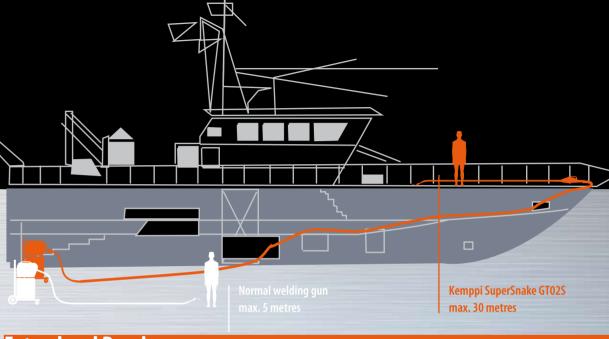

## **Extend and Reach**

The SuperSnake GT02S extends the reach of standard Euro MIG welding guns, providing simple distance wire feeding for a variety of filler wires up to 30 m.

The SuperSnake connects easily to FastMig MXF wire feed units, bringing quality welding to locations that other welding brands just can't reach.