



# Cromacore DW 316LP


FCAW - Flux cored arc welding  
Stainless Steel

Date: 2007-05-25  
Revision: 12

### Description:

Cromacore DW 316LP is a rutile flux cored wire intended for welding the 19% Cr / 12% Ni / 3% Mo type stainless steels. The wire has been specially designed for fully positional welding at high welding currents. Suitable also for related stabilised grades if service temperature is below 400°C. Cromacore DW 316LP operates with a very stable, spatter free arc and produces a bright, smooth weld bead surface and self-releasing slag. Ideal for high productivity welding in the vertical position.

### Welding positions:



### Welding current:

DC+

### Deposition efficiency:

87%

### Shielding gas:

M21, 80% Ar + 20% CO<sub>2</sub>, 22-25 l/min  
C1, 100% CO<sub>2</sub>, 22-25 l/min

### Stick-out:

15-25 mm

### Ferrite content:

FN 9

### Chemical composition, wt.%

	C	Si	Mn	P	S	Cr	Ni
Min			0.5			17.0	11.0
Typical	0.03	0.8	1.5	0.022	0.011	18.6	12.4
Max	0.04	1.0	2.0	0.030	0.025	20.0	13.0

	Mo	Cu	V	Nb
Min	2.5			
Typical	2.9	0.067	0.1	0.08
Max	3.0	0.5	0.2	0.1

### Mechanical properties

	Specified	Typical
Yield strength, R <sub>p0.2</sub> %:		430 MPa
Tensile Strength, R <sub>m</sub> :	≥ 510 MPa	600 MPa
Elongation, A <sub>5</sub> :	≥ 30%	36%
Impact energy, CV:		-20°C • 40 J


### Classification:

AWS A5.22 E 316LT1-4/-1  
ISO 17633-A T 19 12 3 L P M/C 1


### Approvals:

GL 4429S  
LR 316L S  
TÜV 09142.00  
DNV 316L  
CE

### Recommended parameter range:

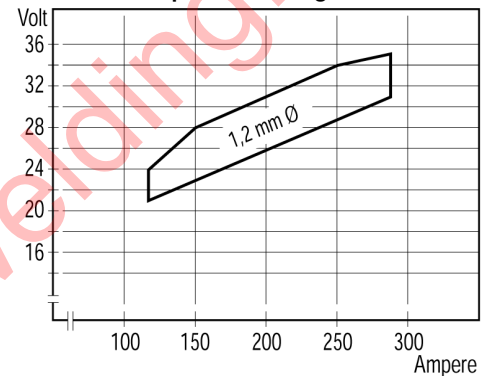

### Deposition rate per hour:

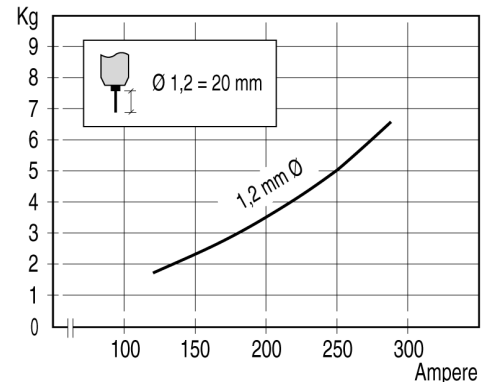

### Product data:

Diam.mm	Product code	Spool weight
1,2	95741012	15 kg BS300
1,2	95741112	5 kg BS200

### Note

Strip:  
S ≤ 0.03%  
P ≤ 0.04%  
N ≤ 0.06%