

FACT SHEET

RTF-X TIG BT / Wireless foot-operated remote control

Product description

RTF - X TIG BT



- Foot-operated remote control for wireless connection
- Compatible with all Tetrix XQ welding machines from serial number 806951 and an Expert 3.0 control unit from software update v1.0.8
- With the separately available BT dongle, compatible with all Pico, Picotig, Tetrix and Microplasma welding machines with 19-pin interface (see compatibility table on page 2)
- Infinitely adjustable welding current (0 % to 100 %) depending on the preselected main current on the welding machine
- Working point adjustment directly at the welding station
- 'Find' function for coupled devices

Coupling foot-operated remote control with welding unit



from serial number 806951

Expert 3.0 TIG

or

BT-Dongle 19pol



Technical data

Connection	Wireless
Dimensions (L x W x H)	377 mm x 154 mm x 228 mm 14.8 inch x 6.1 inch x 8.9 inch
Weight	2,9 kg 6.4 lbs
Product certification	CE UK EAC
Energy supply	3 x AAA-batteries*

*Not included



EWM GmbH | www.ewm-group.com | 2024-10-15

The content of this document has been researched, prepared and reviewed with all reasonable care.

The information provided is subject to change; errors excepted. All prices are excluding VAT as well as any price increases or alloy surcharges.



FACT SHEET

RTF-X TIG BT / Wireless foot-operated remote control

Robust and safe design

+ Wireless

- Coupling via wireless connection
- Free positioning of the foot remote control
- No restriction of the welding position
- Display of connection status and battery charge
- 'Find' function: Search function of the paired device when using several foot remote controls. The search function can be activated on the power source, foot control or dongle. The paired device flashes.

+ Stainless steel clip

- Easily adjust the position of the remote control with your foot
- One-sided opening allows easy yet secure positioning of the foot on the tread surface
- Tool-free assembly on both sides of the remote control

+ Tread surface


- The large tread surface ensures safe and comfortable operation (L= 312 mm W¹=117 mm W²=142 mm)
- The slip-proof coating prevents slipping, even with wet or dirty soles
- A raised edge at the heel prevents accidental slipping from the tread surface and can also be used to pull the remote control back
- Suitable for any shoe size

+ Rubber feet

- Secure positioning on any surface
- Prevent accidental movement of the remote control
- Can be quickly replaced when worn down with no need to open the casing

+ Hook

- Large, sturdy hook for transport on EWM machines and Trolley transport systems or standard transport carts

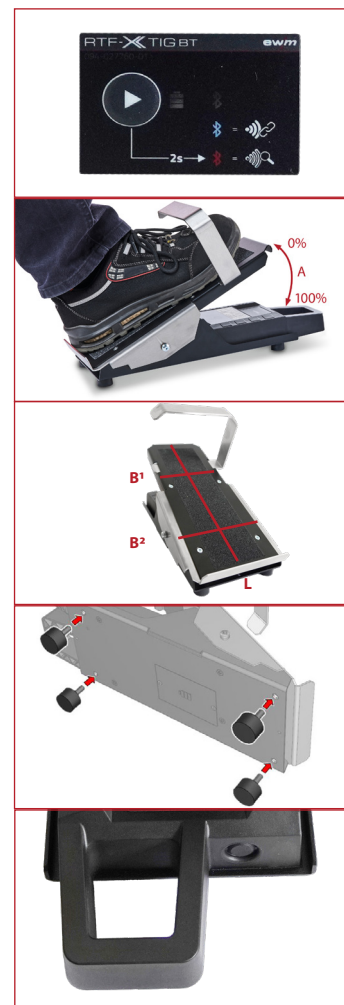

Item numbers

Type	Description	Item number	PG	Price
RTF-X TIG BT	Wireless foot-operated remote control	090-008854-00000	M1	£ 495.00
BT-Dongle	Dongle for connecting the wireless remote control to the 19-pin interface	090-005702-00000	M1	£ 285.00
Note: The connection of the remote foot control with Expert 3.0 control is compatible with all Tetrix XQ welding machines with the Expert 3.0 control from serial number 806951 and only possible from software update v1.0.8. Devices with older serial numbers require an update of the master software.				
Software-update Expert 3.0-control system	Free software-update for Expert 3.0 -control system before Version v1.0.8	Free download here!		
Update master software Tetrix XQ	Update for Tetrix XQ - welding device with serial number before 806951	Your local EWM dealer will be happy to advise you! Find your contact person here		

Compatibility of BT-Dongle 19pol

Pico	Picotig	Tetrix	Tetrix XQ	Microplasma
180	200	200	230	25-2
200	220	230	300	55-2
220		300	350	105-2
300		351	400	-
350		451	500	-
400		551	600	-