

Minex



Product features

This regulator is ideal for smaller workshops, offering a compact design, precise flow and a built-in safety valve for optimal user experience.

- **Compact design:** Optimized to take up minimal space and fit perfectly in smaller workshops.
- **Adjustable precision flow:** Allows for adjustment to ensure precise flow for increased accuracy.
- **Built-in safety vale:** Ensures the highest possible level of safety for the user.

Technical data

Type	1-stage / cylinder
Regulator class	10
Standard	ISO 2503
Gas	Ar/mix / CO ²
Temperature range	-20°C up to +60°C

Pressure / Flow

Inlet pressure P ₁	200 bar
Outlet pressure P ₂	0-10 bar
Q _n	0-30L/min


Materials:

Valve Body	CW 617N / CW 614N
Valve seat	Teflon(PTFE)
Diaphragm	Neoprene, NN 0060
Hand wheel	ABS

Connections:

Inlet	See page 2
Outlet	See page 2

Dimensions

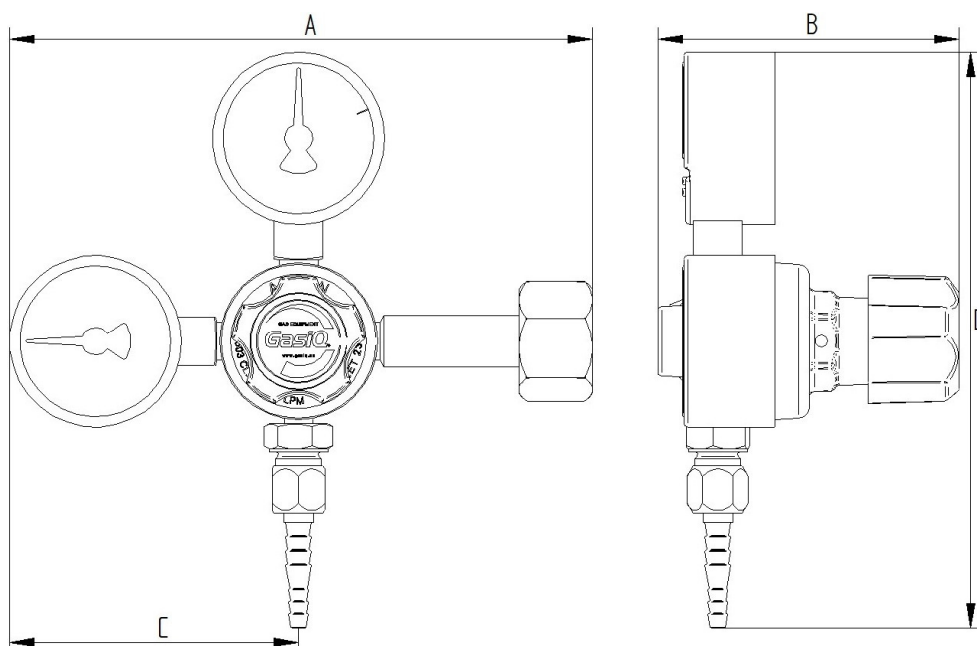

Minex					
Inlet	Outlet	A	B	C	D
W21.8"	G1/4"	166mm	86mm	82mm	164mm
W21.8"	M12X1	166mm	86mm	82mm	164mm
W21.8"	G3/8"	166mm	86mm	82mm	164mm
W24.32"	G3/8"	166mm	86mm	82mm	164mm
W24.52"	G3/8"	208mm	86mm	82mm	164mm
G3/4"	G3/8"	166mm	86mm	82mm	164mm