


Altop I & II

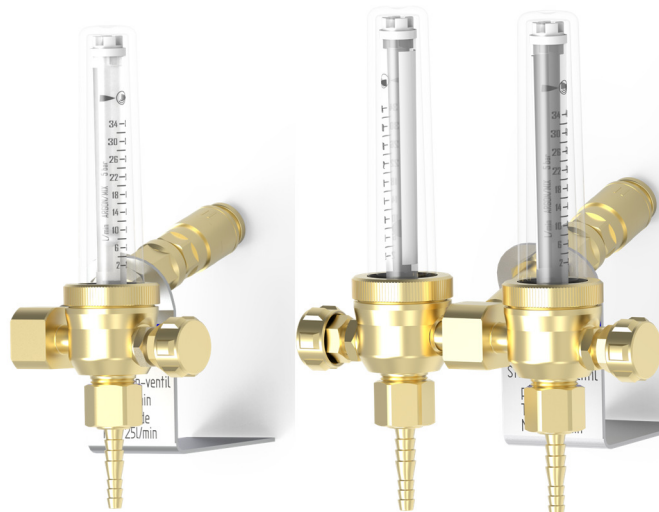

The flowmeter tube is calibrated at 5 bar. For accurate flow readings the inlet pressure should be **max 5 bar!**

Product features

This flow meter is designed to fit Air Liquid's Altop and Minitop cylinders, offering an easy, safe and reliable use without the need for additional equipment.

- **Compatibility with Air Liquid's cylinders:** Specifically designed to fit with Altop and Minitop for seamless and easy use.
- **Quick and safe connection:** Designed with a quick coupling (EN 561) for fast and secure connection without additional fittings.
- **Easy installation:** No additional fittings are required to use the flow meter, simplifying the installation process and reducing the risk of incorrect assembly.

Technical data

Type	Flow meter
Gas	Ar/mix

Pressure / Flow

Inlet pressure P_1	10 bar
Q_n	0-25L/min


Materials:

Valve body	CW 614N
Console	Stainless steel
Flow tube	Grilamid TR90°

Connections:

Inlet	See page 2
Outlet	See page 2

Dimensions

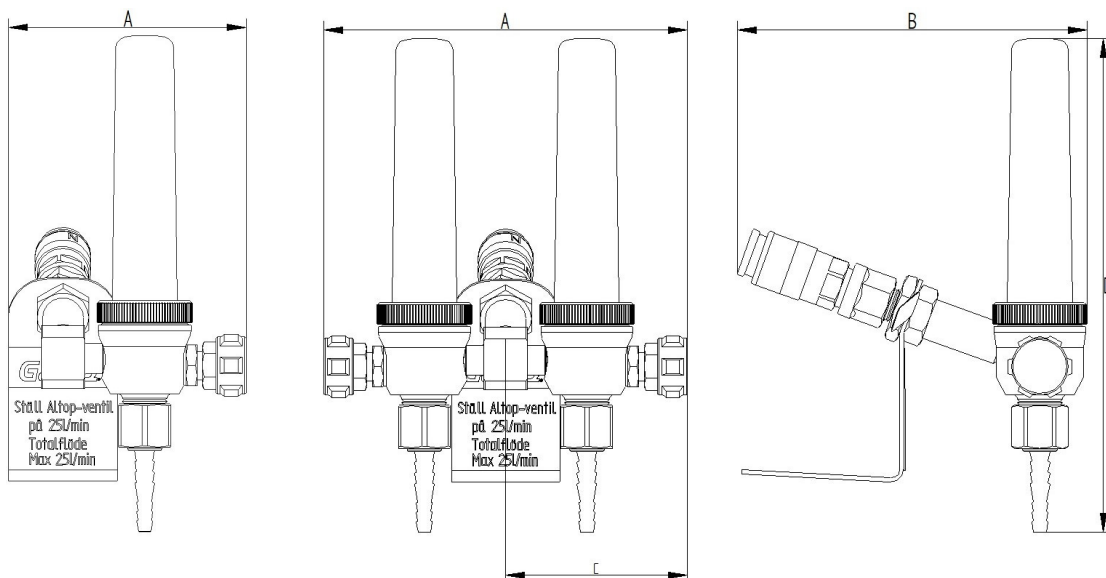

Altop 1					
Inlet	Outlet	A	B	C	D
QC EN 561 F	G3/8"	87mm	129mm	67mm	182mm
G3/8" L	G3/8" L	87mm	129mm	67mm	182mm

Altop 2					
Inlet	Outlet	A	B	C	D
EN 561 QC F	G3/8"	134mm	129mm	67mm	182mm