

Speedy Purge Systems

Sizes: 8 to 80" (190 to 2044mm)


The GBC Speedy Purge System for pipe and vessel purging comprises a tandem inflatable dam system connected by an umbilical hose and collar to reduce the volume being purged. A gas exhaust valve is installed between the primary and secondary dam, along with an auxiliary Argon purge line. The system is positioned by viewing the luminous tape through the weld joint gap. E-Z ZONE TAPE is used to seal the weld gap and purge gas flow can commence at up to 20 Ltr/min. The bags inflate, a seal is created either side of the weld joint and the pressure valve releases gas into the weld chamber. By using a GBC Oxygen Monitor to constantly measure the oxygen content in the weld chamber the welder will know when to reduce the gas flow and commence welding.

The system is left in position post welding until the weld joint temperature drops to below oxidation levels, then the purge gas feed is disconnected, the bags deflate and the system can be withdrawn.



Speedy Purge used to weld a stainless steel elbow.

How it works

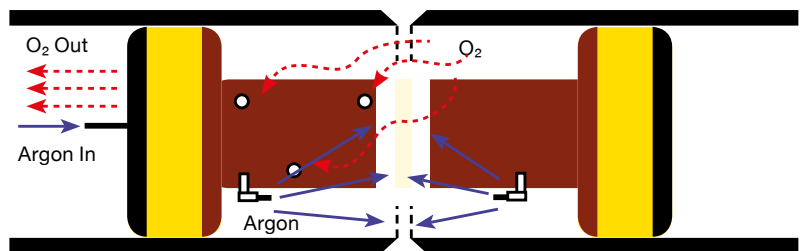

Part Nos & Sizing

Part No.	Expansion Range	Weight kg
SP08	190 - 215 mm	1.4
SP10	242 - 267 mm	1.7
SP12	291 - 316 mm	2.1
SP14	318 - 343 mm	2.5
SP16	369 - 394 mm	2.7
SP18	420 - 445 mm	3.0
SP20	471 - 496 mm	3.4
SP22	553 - 577 mm	3.6
SP24	572 - 597 mm	3.8
SP26	620 - 645 mm	4.5
SP28	671 - 696 mm	5.5
SP30	722 - 747 mm	6.0
SP32	772 - 797 mm	8.0
SP36	874 - 899 mm	9.1
SP40	990 - 1015 mm	9.9
SP42	1023 - 1048 mm	13.2
SP44	1125 - 1150 mm	13.7
SP48	1175 - 1200 mm	15.0
SP54	1359 - 1384 mm	18.0
SP60	1512 - 1537 mm	20.0
SP72	1816 - 1841 mm	28.0
SP80	2019 - 2044 mm	30.0